




## Bellmouth Dimensions

Bellmouth is the optimum flow fitting for tapping round pipe or flexhose to a flat surface. It is the proper fitting as recommended by the ACGIH, that must be used when tapping to a flat surface when space allows. For example, you can locate a bellmouth on the under side of a table saw, then attach ducting.

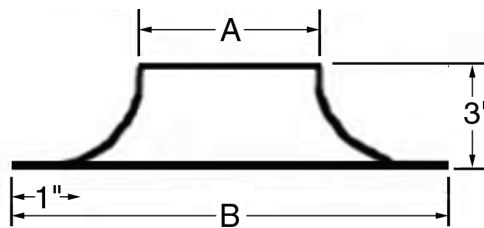

Diameter "A"	Overall Width "B"	Wt. Lbs.
4"		
5"		
6"	10"	1.4
7"	11"	1.5
8"	12"	1.7
9"	13"	1.8
10"	14"	2.0
11"	15"	2.1
12"	16"	2.3
13"	17"	2.5
14"	18"	2.6
15"	19"	2.8
16"	20"	2.9
17"	21"	3.1
18"	22"	3.3
20"	24"	3.5
22"	26"	3.9
24"	28"	4.2